



# PRODUCT CATALOG



START CHEERFUL JOURNEY WITH JOYROAD

PASSENGER AND LIGHT TRUCK TIRES



# Contents

## JOYROAD *TIRE*

### \* JOYROAD Qualifications

#### **Touring Performance**

TOUR RX1 ..... 1-2

#### **High Performance**

HP RX3 ..... 3-4

TAXI RX328 ..... 5

#### **Commercial Light Truck**

RX501 ..... 6

VAN RX5 ..... 7-8

RX566 ..... 9-10

#### **Ultra High Performance**

SPORT RX6 ..... 11-14

#### **SUV/Light Truck**

SUV RX702 ..... 15-16

SUV RX706 ..... 17-18

#### **A/T Tire**

ADVENTURE A/T ..... 19-20

#### **HT Tire**

GRAND TOURER H/T... 21-22

A/S RX718 ..... 23

#### **Trailer Tire**

ST100 ..... 24

#### **Mud Tire**

MT200 ..... 25-26

#### **Winter Tire**

WINTER RX808 ..... 27-30

WINTER RX818 ..... 31-32

WINTER RX826 ..... 33-34

WINTER RX821  
RX828 ..... 35-36



## TOUR RX1

- Optimized pitch design effectively reduces tire noise.
- Anti-slip sipe improves driving stability and braking performance on wet road.
- Streamline transversal grooves ensure safe handling and high speed stability.



| SIZE      | LOAD INDEX | SPEED RANGE | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|-----------|------------|-------------|--------------|--------------------|-----------------------|-----------------|------|--------------|-----|------------------|
|           |            |             |              |                    |                       | KG              | LBS  | KPa          | PSI |                  |
| 145/70R12 | 69         | T           | 4.50B        | 150                | 509                   | 325             | 716  | 300          | 44  | 6.1              |
| 155/65R13 | 73         | T           | 4.50B        | 157                | 532                   | 365             | 805  | 300          | 44  | 7.3              |
| 155/70R13 | 75         | T           | 4.50B        | 157                | 548                   | 387             | 853  | 300          | 44  | 7.3              |
| 155/80R13 | 79         | T           | 4.50B        | 157                | 578                   | 437             | 963  | 300          | 44  | 7.3              |
| 165/65R13 | 77         | T           | 5.00B        | 170                | 544                   | 412             | 908  | 300          | 44  | 7.6              |
| 165/70R13 | 79         | T           | 5.00B        | 170                | 562                   | 437             | 963  | 300          | 44  | 7.6              |
| 165/80R13 | 83         | T           | 4.50B        | 165                | 594                   | 487             | 1074 | 300          | 44  | 7.8              |
| 175/60R13 | 77         | T/H         | 5J           | 177                | 540                   | 412             | 908  | 300          | 44  | 7.3              |
| 175/70R13 | 82         | T/H         | 5.00B        | 177                | 576                   | 475             | 1047 | 300          | 44  | 7.8              |
| 185/70R13 | 86         | T           | 5.50B        | 189                | 590                   | 530             | 1168 | 300          | 44  | 7.8              |
| 165/70R14 | 81         | T           | 5J           | 170                | 588                   | 462             | 1019 | 300          | 44  | 7.6              |
| 175/65R14 | 82         | T/H         | 5J           | 177                | 584                   | 475             | 1047 | 300          | 44  | 7.8              |
| 175/65R14 | 86 XL      | T           | 5J           | 177                | 584                   | 530             | 1168 | 340          | 51  | 7.8              |
| 175/70R14 | 84         | T/H         | 5J           | 177                | 602                   | 500             | 1102 | 300          | 44  | 7.8              |
| 175/70R14 | 88XL       | T           | 51/2J        | 177                | 602                   | 560             | 1235 | 340          | 51  | 7.8              |
| 185/70R14 | 88         | T/H         | 51/2J        | 189                | 616                   | 560             | 1235 | 300          | 44  | 7.8              |

| SIZE    | LOAD INDEX | SPEED RANGE | PLY | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX LOAD DOUBLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|---------|------------|-------------|-----|--------------|--------------------|-----------------------|-----------------|------|-----------------|------|--------------|-----|------------------|
|         |            |             |     |              |                    |                       | KG              | LBS  | KG              | LBS  | KPa          | PSI |                  |
| 155R12C | 83/81      | Q           | 6PR | 4.50B        | 157                | 550                   | 487             | 1075 | 462             | 1020 | 350          | 51  | 7.6              |
| 155R12C | 88/86      | Q           | 8PR | 4.50B        | 157                | 550                   | 487             | 1075 | 462             | 1020 | 350          | 51  | 7.6              |



Comfort



Safety



Drainage




**HP RX3**

- Four grooves with open shoulder provides perfect water evacuation.
- Center rib design delivers better straight handling.
- Improved shoulder sipes provide better handling during cornering and low noise emission.



| SIZE       | LOAD INDEX | SPEED RANGE | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|------------|------------|-------------|--------------|--------------------|-----------------------|----------|------|--------------|-----|------------------|
|            |            |             |              |                    |                       | KG       | LBS  | KPa          | PSI |                  |
| 175/70R12  | 80         | T           | 5.00 B       | 177                | 551                   | 450      | 992  | 300          | 44  | 6.9              |
| 175/65R13  | 80         | T           | 5J           | 177                | 558                   | 475      | 1047 | 300          | 44  | 7.8              |
| 155/65R14  | 79 XL      | T           | 4 1/2J       | 157                | 558                   | 437      | 963  | 340          | 50  | 7.3              |
| 165/60R14  | 75         | T           | 5J           | 170                | 554                   | 387      | 853  | 300          | 44  | 7.8              |
| 165/65R14  | 79         | T           | 5J           | 170                | 570                   | 437      | 963  | 300          | 44  | 7.6              |
| 185/55R14  | 80         | V/H         | 6J           | 194                | 560                   | 450      | 992  | 300          | 44  | 7.8              |
| 185/60R14  | 82         | H           | 5 1/2J       | 189                | 578                   | 475      | 1047 | 300          | 44  | 7.8              |
| 185/65R14  | 86         | T/H         | 5 1/2J       | 189                | 596                   | 530      | 1168 | 300          | 44  | 7.8              |
| 195/60R14  | 86         | H           | 6J           | 201                | 590                   | 530      | 1168 | 300          | 44  | 7.8              |
| 195/70R14  | 91         | T/H         | 6J           | 201                | 630                   | 615      | 1356 | 300          | 44  | 7.8              |
| 205/60R14  | 88         | V           | 6J           | 205                | 602                   | 560      | 1235 | 300          | 44  | 7.8              |
| 205/70R14  | 98 XL      | H/V         | 6J           | 209                | 644                   | 750      | 1653 | 340          | 51  | 7.8              |
| 185/55R15  | 82         | V           | 6J           | 194                | 585                   | 475      | 1047 | 300          | 44  | 7.8              |
| 185/60R15  | 84         | H           | 5 1/2J       | 189                | 603                   | 500      | 1102 | 300          | 44  | 7.8              |
| 185/65R15  | 88         | T/H         | 5 1/2J       | 189                | 621                   | 560      | 1235 | 300          | 44  | 7.8              |
| 185/65R15  | 92         | T           | 5 1/2J       | 189                | 621                   | 630      | 1389 | 340          | 50  | 7.8              |
| 195/50R15  | 82         | H/V         | 6J           | 201                | 577                   | 475      | 1047 | 300          | 44  | 7.8              |
| 195/55R15  | 85         | V           | 6J           | 201                | 595                   | 515      | 1135 | 300          | 44  | 7.8              |
| 195/60R15  | 88         | H/V         | 6J           | 201                | 615                   | 560      | 1235 | 300          | 44  | 7.8              |
| 195/65R15  | 91         | H/V         | 6J           | 201                | 635                   | 615      | 1356 | 300          | 44  | 7.8              |
| 195/65R15  | 95         | H           | 6J           | 201                | 635                   | 690      | 1521 | 340          | 50  | 7.8              |
| 205/60R15  | 91         | H/V         | 6J           | 209                | 627                   | 615      | 1356 | 300          | 44  | 7.8              |
| 205/65R15  | 94         | H/V         | 6J           | 209                | 647                   | 670      | 1477 | 300          | 44  | 7.8              |
| 205/70R15  | 96         | H           | 6J           | 209                | 669                   | 710      | 1565 | 300          | 44  | 7.8              |
| P215/75R15 | 101        | H/V         | 6J           | 216                | 703                   | 825      | 1819 | 300          | 44  | 7.8              |
| P215/75R15 | 100        | H           | 6J           | 216                | 703                   | 790      | 1742 | 300          | 44  | 7.8              |
| P225/75R15 | 104        | H/V         | 6J           | 223                | 719                   | 900      | 1984 | 300          | 44  | 7.8              |
| 205/55R16  | 91         | H/V         | 6 1/2J       | 214                | 632                   | 615      | 1356 | 300          | 44  | 7.8              |
| 205/60R16  | 92         | H/V         | 6J           | 209                | 652                   | 630      | 1389 | 300          | 44  | 7.8              |
| 205/60R16  | 96 XL      | V           | 6J           | 209                | 652                   | 710      | 1565 | 340          | 51  | 7.8              |
| 215/60R16  | 95         | H/V         | 6 1/2J       | 221                | 664                   | 690      | 1521 | 300          | 44  | 7.8              |
| 215/60R16  | 99 XL      | V           | 6 1/2J       | 221                | 664                   | 775      | 1709 | 340          | 51  | 7.8              |
| 215/65R16  | 98         | H/V         | 6 1/2J       | 221                | 686                   | 750      | 1653 | 300          | 44  | 7.8              |
| 225/60R16  | 98         | H/V         | 6 1/2J       | 228                | 676                   | 750      | 1653 | 300          | 44  | 7.8              |

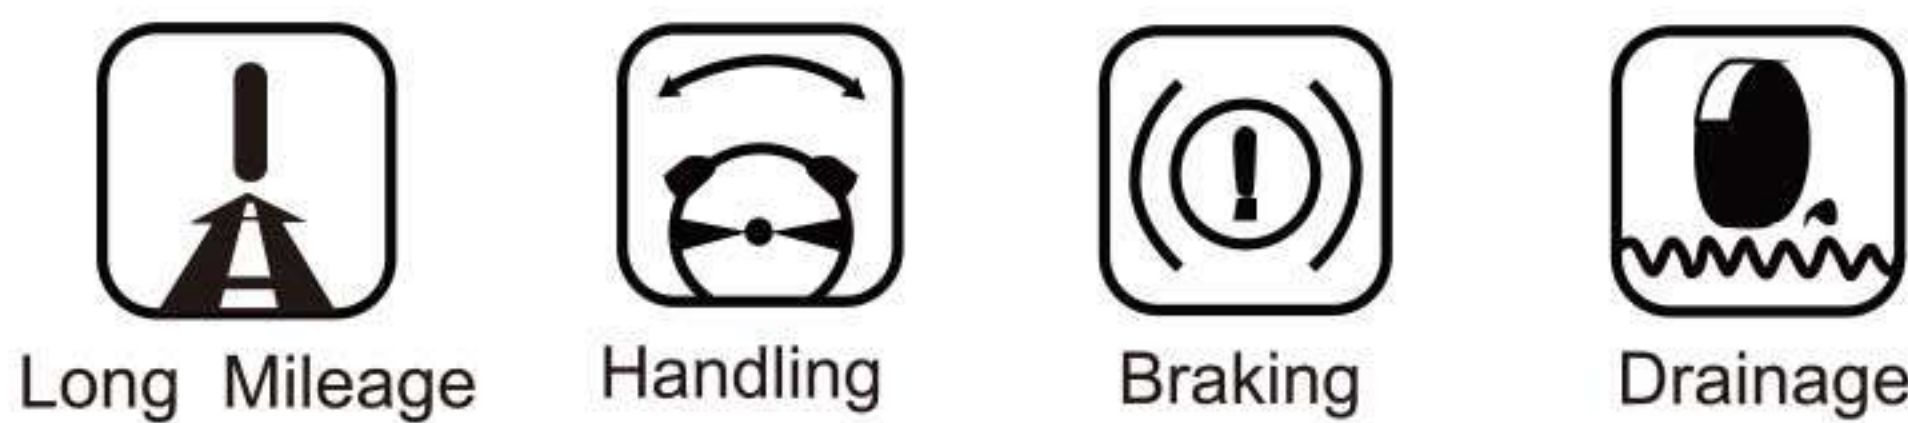

TAXI RX328



RX328

| SIZE      | LOAD INDEX | SPEED RANGE | STANDARD RIM | SECTION WIDTH(MM) | OVERALL DIAMETER(MM) | MAX LAOD |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|-----------|------------|-------------|--------------|-------------------|----------------------|----------|------|--------------|-----|------------------|
|           |            |             |              |                   |                      | KG       | LBS  | KPa          | PSI |                  |
| 165/70R13 | 79         | T           | 5.00B        | 170               | 562                  | 437      | 963  | 300          | 44  | 8.7              |
| 175/70R14 | 84         | T           | 5.00B        | 177               | 602                  | 500      | 1102 | 300          | 44  | 8.7              |
| 185/60R14 | 82         | H           | 5 1/2J       | 189               | 578                  | 475      | 1047 | 300          | 44  | 8.7              |
| 195/60R14 | 86         | H           | 6J           | 201               | 590                  | 530      | 1168 | 300          | 44  | 8.7              |
| 185/65R15 | 88         | H           | 5 1/2J       | 189               | 621                  | 560      | 1235 | 300          | 44  | 8.7              |
| 195/60R15 | 88         | H           | 6J           | 201               | 615                  | 560      | 1235 | 300          | 44  | 8.7              |
| 195/65R15 | 91         | H           | 6J           | 201               | 635                  | 615      | 1356 | 300          | 44  | 8.7              |



RX501

RX501

| SIZE           | LOAD INDEX | SPEED RANGE | PLY | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX LOAD DOUBLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|----------------|------------|-------------|-----|--------------|--------------------|-----------------------|-----------------|------|-----------------|------|--------------|-----|------------------|
|                |            |             |     |              |                    |                       | KG              | LBS  | KG              | LBS  | KPa          | PSI |                  |
| 155R13C        | 85/83      | N           | 6PR | 4.50B        | 157                | 578                   | 515             | 1135 | 487             | 1074 | 350          | 51  | 8.0              |
| 155R13C        | 90/88      | N           | 8PR | 4.50B        | 157                | 578                   | 600             | 1323 | 565             | 1245 | 450          | 65  | 8.0              |
| 165R13C        | 91/89      | N           | 6PR | 4 1/2J       | 165                | 594                   | 615             | 1356 | 580             | 1269 | 375          | 54  | 8.0              |
| 165R13C        | 94/93      | N           | 8PR | 4 1/2J       | 165                | 594                   | 670             | 1475 | 650             | 1435 | 450          | 65  | 8.0              |
| 165/70R13LT(C) | 88/86      | T           | 6PR | 5J           | 170                | 562                   | 560             | 1235 | 530             | 1170 | 375          | 54  | 8.0              |
| 175R13C        | 94/92      | N           | 6PR | 5.00B        | 177                | 610                   | 670             | 1477 | 630             | 1389 | 375          | 54  | 8.0              |
| 175R13C        | 97/95      | Q           | 8PR | 5.00B        | 177                | 610                   | 730             | 1609 | 690             | 1521 | 450          | 65  | 8.0              |
| 165/70R14LT    | 89/87      | R           | 6PR | 5J           | 170                | 588                   | 580             | 1280 | 545             | 1200 | 375          | 54  | 8.0              |



**VAN**  
**RX5**



- Special compound design ensures a long mileage.
- The combination of blocks provides a superior driving performance and a strong grip.
- Three main grooves contribute to better water drainage and wet traction.

| SIZE        | LOAD INDEX | SPEED RANGE | PLY  | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX LOAD DOUBLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|-------------|------------|-------------|------|--------------|--------------------|-----------------------|-----------------|------|-----------------|------|--------------|-----|------------------|
|             |            |             |      |              |                    |                       | KG              | LBS  | KG              | LBS  | KPa          | PSI |                  |
| 175/70R14LT | 95/93      | R           | 6PR  | 5J           | 177                | 602                   | 690             | 1520 | 650             | 1435 | 375          | 54  | 8                |
| 185R14C     | 102/100    | Q           | 8PR  | 5 1/2J       | 188                | 650                   | 850             | 1874 | 800             | 1764 | 450          | 65  | 8.4              |
| 185R14C     | 104        | N           |      | 5 1/2J       | 188                | 650                   | 850             | 1874 | 800             | 1764 | 450          | 65  | 8.4              |
| 195R14C     | 106/104    | Q           | 8PR  | 5 1/2J       | 198                | 666                   | 950             | 2094 | 900             | 1984 | 450          | 65  | 8.7              |
| 195R15C     | 106/104    | Q           | 8PR  | 5 1/2J       | 198                | 690                   | 950             | 2094 | 900             | 1984 | 450          | 65  | 8.7              |
| 195/70R15C  | 104/102    | R           | 8PR  | 6J           | 201                | 655                   | 900             | 1984 | 850             | 1874 | 450          | 65  | 10.2             |
| 205/70R15C  | 106/104    | R           | 8PR  | 6J           | 209                | 669                   | 950             | 2094 | 900             | 1984 | 450          | 65  | 10.2             |
| 215/70R15C  | 109/107    | S           | 8PR  | 6 1/2J       | 221                | 683                   | 1030            | 2270 | 975             | 2150 | 450          | 65  | 9.7              |
| 215/75R15LT | 100/97     | N           | 6PR  | 6J           | 216                | 703                   | 800             | 1765 | 730             | 1610 | 350          | 50  | 9.7              |
| 225/70R15C  | 112/110    | R           | 8PR  | 6 1/2J       | 228                | 697                   | 1120            | 2469 | 1060            | 2337 | 450          | 65  | 10.2             |
| 185/75R16C  | 104/102    | R           | 8PR  | 5J           | 184                | 684                   | 900             | 1984 | 850             | 1874 | 475          | 68  | 8.4              |
| 195/65R16C  | 104/102    | R           | 8PR  | 6J           | 201                | 660                   | 900             | 1984 | 850             | 1874 | 475          | 68  | 9.7              |
| 195/65R16C  | 100/98     | R           | 6PR  | 6J           | 201                | 660                   | 800             | 1764 | 750             | 1653 | 375          | 54  | 9.7              |
| 195/75R16C  | 107/105    | R           | 8PR  | 5 1/2J       | 196                | 698                   | 975             | 2149 | 925             | 2039 | 475          | 68  | 8.7              |
| 205/65R16C  | 107/105    | R           | 8PR  | 6J           | 209                | 672                   | 975             | 2149 | 925             | 2039 | 475          | 68  | 9.7              |
| 215/65R16C  | 109/107    | R           | 8PR  | 6 1/2J       | 221                | 686                   | 1030            | 2271 | 975             | 2149 | 475          | 68  | 9.7              |
| 215/70R16LT | 104/102    | N           | 8PR  | 6 1/2J       | 221                | 708                   | 900             | 1984 | 850             | 1874 | 450          | 65  | 9.7              |
| 215/70R16LT | 100/97     | N           | 6PR  | 6 1/2J       | 221                | 708                   | 800             | 1764 | 730             | 1610 | 350          | 50  | 9.7              |
| 215/70R16LT | 106/104    | N           | 10PR | 6 1/2J       | 221                | 708                   | 950             | 2094 | 900             | 1984 | 550          | 80  | 9.7              |
| 215/70R16LT | 108/106    | T           | 8PR  | 6 1/2J       | 221                | 708                   | 1000            | 2205 | 950             | 2094 | 450          | 65  | 9.7              |
| 215/75R16C  | 116/114    | R           | 10PR | 6J           | 216                | 728                   | 1250            | 2756 | 1180            | 2601 | 525          | 76  | 9.7              |
| 215/75R16C  | 113/111    | R           | 8PR  | 6J           | 216                | 728                   | 1150            | 2535 | 1090            | 2403 | 475          | 68  | 9.7              |
| 225/65R16C  | 112/110    | R           | 8PR  | 6 1/2J       | 228                | 698                   | 1120            | 2469 | 1060            | 2337 | 475          | 68  | 9.7              |
| 235/65R16C  | 115/113    | R           | 8PR  | 7J           | 240                | 712                   | 1215            | 2679 | 1150            | 2535 | 475          | 68  | 9.7              |

The Size With \* Can Not Be Produced Now.



Handling



Braking



| SIZE      | LOAD INDEX | SPEED RANGE | PLY  | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX LOAD DOUBLE |      | MAX PRESSURE |     | TREAD DEPTH(MM) |
|-----------|------------|-------------|------|--------------|--------------------|-----------------------|-----------------|------|-----------------|------|--------------|-----|-----------------|
|           |            |             |      |              |                    |                       | KG              | LBS  | KG              | LBS  | KPa          | PSI |                 |
| 6.00R13LT | 93/89      | P           | 8PR  | 4.50B        | 164                | 650                   | 650             | 1435 | 580             | 1280 | 415          | 60  | 8.2             |
| 6.00R14LT | 95/90      | P           | 8PR  | 4 1/2J       | 158                | 626                   | 690             | 1521 | 600             | 1325 | 415          | 60  | 8.2             |
| 6.00R15LT | 97/92      | P           | 8PR  | 4.50E        | 170                | 705                   | 730             | 1610 | 630             | 1390 | 415          | 60  | 8.2             |
| 6.50R16LT | 107/102    | M           | 10PR | 5.50F        | 185                | 750                   | 975             | 2150 | 850             | 1875 | 560          | 81  | 9.7             |
| 7.00R16LT | 109/107    | M           | 8PR  | 5.50F        | 198                | 778                   | 1025            | 2260 | 980             | 2160 | 450          | 65  | 10.7            |
| 7.00R16LT | 113/111    | M           | 10PR | 5.50F        | 198                | 778                   | 1130            | 2490 | 1075            | 2370 | 525          | 76  | 10.7            |
| 7.00R16LT | 117/116    | N           | 12PR | 5.50F        | 198                | 778                   | 1285            | 2835 | 1250            | 2755 | 670          | 97  | 10.7            |
| 7.50R16LT | 123/121    | M           | 14PR | 6.00G        | 215                | 805                   | 1510            | 3330 | 1440            | 3175 | 700          | 102 | 10.7            |



Handling



Braking



Drainage

# KARRIER

## RX566

- Suitable for various light-load goods vehicles.
- Excellent traction, braking and steering performance combined with good water dispersion and self-cleaning ability.





# SPORT RX6

- Special asymmetric pattern design provides excellent high speed and handling performance.
- Spiral groove design contributes to outstanding water evacuation and wet grip.
- Special compound design reduces heat generation and enhances grip performance under all road conditions.



Handling



Braking



Drainage

| SIZE       | LOAD INDEX | SPEED RANGE | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|------------|------------|-------------|--------------|--------------------|-----------------------|-----------------|------|--------------|-----|------------------|
|            |            |             |              |                    |                       | KG              | LBS  | KPa          | PSI |                  |
| 175/50R16  | 77         | V           | 5 1/2J       | 182                | 582                   | 412             | 908  | 300          | 44  | 7.8              |
| 185/50R16  | 81         | V           | 6J           | 194                | 592                   | 462             | 1019 | 300          | 44  | 7.8              |
| 195/45R16  | 84 XL      | V           | 6 1/2J       | 195                | 582                   | 500             | 1102 | 340          | 50  | 7.8              |
| 195/50R16  | 88 XL      | V           | 6J           | 201                | 602                   | 560             | 1235 | 340          | 50  | 7.8              |
| 195/55R16  | 87         | W           | 6J           | 201                | 620                   | 545             | 1201 | 300          | 44  | 7.8              |
| 195/60R16  | 89         | H           | 6J           | 201                | 640                   | 580             | 1279 | 300          | 44  | 7.8              |
| 205/45ZR16 | 87XL       | W           | 7J           | 206                | 590                   | 545             | 1201 | 340          | 50  |                  |
| 205/50R16  | 87         | W/V         | 6 1/2J       | 214                | 612                   | 545             | 1201 | 300          | 44  | 7.8              |
| 205/55R16  | 91         | W/V         | 6 1/2J       | 214                | 632                   | 615             | 1356 | 300          | 44  | 7.8              |
| 205/55R16  | 94 XL      | W/V         | 6 1/2J       | 214                | 632                   | 670             | 1477 | 340          | 50  | 7.8              |
| 215/55R16  | 97 XL      | W/V         | 7J           | 226                | 642                   | 730             | 1609 | 340          | 50  | 7.8              |
| 225/50R16  | 96 XL      | W/V         | 7J           | 233                | 632                   | 710             | 1565 | 340          | 50  | 7.8              |
| 225/55R16  | 99 XL      | W/V         | 7J           | 233                | 654                   | 775             | 1709 | 340          | 50  | 7.8              |
| 225/55R16  | 95         | W/V         | 7J           | 233                | 654                   | 690             | 1521 | 300          | 44  | 7.8              |
| 195/40ZR17 | 81 XL      | W           | 7J           | 200                | 588                   | 462             | 1019 | 340          | 50  | 7.8              |
| 195/45ZR17 | 85 XL      | W           | 6 1/2J       | 195                | 608                   | 515             | 1135 | 340          | 50  | 7.8              |
| 205/40R17  | 84 XL      | W           | 7 1/2J       | 212                | 596                   | 500             | 1102 | 340          | 50  | 7.8              |
| 205/45R17  | 88 XL      | W           | 7J           | 206                | 616                   | 560             | 1235 | 340          | 50  | 7.8              |
| 205/50R17  | 93 XL      | W           | 6 1/2J       | 214                | 638                   | 650             | 1433 | 340          | 50  | 7.8              |
| 215/40R17  | 87 XL      | W           | 7 1/2J       | 218                | 604                   | 545             | 1201 | 340          | 50  | 7.8              |
| 215/45R17  | 91 XL      | W           | 7J           | 213                | 626                   | 615             | 1356 | 340          | 50  | 7.8              |
| 215/45R17  | 87         | W           | 7J           | 213                | 626                   | 545             | 1201 | 300          | 44  | 7.8              |
| 215/50ZR17 | 95 XL      | W           | 7J           | 226                | 648                   | 690             | 1521 | 340          | 50  | 7.8              |
| 215/55ZR17 | 98 XL      | W           | 7J           | 226                | 668                   | 750             | 1653 | 340          | 50  | 7.8              |
| 225/45R17  | 94 XL      | W           | 7 1/2J       | 225                | 634                   | 670             | 1477 | 340          | 50  | 7.8              |
| 225/50ZR17 | 94         | W           | 7J           | 233                | 658                   | 670             | 1477 | 300          | 44  | 7.8              |
| 225/50ZR17 | 98 XL      | W           | 7J           | 233                | 658                   | 750             | 1653 | 340          | 50  | 7.8              |
| 225/55R17  | 101 XL     | W           | 7J           | 233                | 680                   | 825             | 1819 | 340          | 50  | 7.8              |
| 235/45R17  | 97 XL      | W           | 8J           | 236                | 644                   | 730             | 1609 | 340          | 50  | 7.8              |
| 235/55R17  | 103 XL     | W           | 7 1/2J       | 245                | 690                   | 875             | 1929 | 340          | 50  | 7.8              |
| 245/45ZR17 | 99 XL      | W           | 8J           | 243                | 652                   | 775             | 1709 | 340          | 50  | 7.8              |
| 215/35R18  | 84 XL      | W           | 7 1/2J       | 218                | 607                   | 500             | 1102 | 340          | 50  | 7.8              |
| 215/40ZR18 | 85         | W/Y         | 7 1/2J       | 218                | 629                   | 515             | 1135 | 300          | 44  | 7.8              |
| 215/45ZR18 | 89         | W/Y         | 7J           | 213                | 651                   | 580             | 1279 | 300          | 44  | 7.8              |
| 225/40R18  | 92 XL      | W           | 8J           | 230                | 637                   | 630             | 1389 | 340          | 50  | 7.8              |
| 225/45ZR18 | 95 XL      | W           | 7 1/2J       | 225                | 659                   | 690             | 1521 | 340          | 50  | 7.8              |
| 235/40R18  | 95 XL      | W           | 8 1/2J       | 241                | 645                   | 690             | 1521 | 340          | 50  | 7.8              |
| 235/45ZR18 | 98 XL      | Y           | 8J           | 236                | 669                   | 750             | 1653 | 340          | 50  | 7.8              |
| 235/50ZR18 | 101 XL     | Y           | 7 1/2        | 245                | 693                   | 825             | 1819 | 340          | 50  | 7.8              |
| 235/55R18  | 104XL      | V           | 7 1/2J       | 245                | 715                   | 900             | 1984 | 340          | 49  | 7.8              |
| 245/40ZR18 | 97 XL      | W           | 8 1/2J       | 248                | 653                   | 730             | 1609 | 340          | 50  | 7.8              |
| 245/45ZR18 | 100 XL     | W           | 8J           | 243                | 677                   | 800             | 1764 | 340          | 50  | 7.8              |
| 245/50R18  | 100        | Y           | 7 1/2J       | 253                | 703                   | 800             | 1764 | 300          | 44  | 7.8              |
| 255/35ZR18 | 94 XL      | W           | 9J           | 260                | 635                   | 670             | 1477 | 340          | 50  | 7.8              |
| 265/35ZR18 | 93         | W           | 9 1/2J       | 271                | 643                   | 650             | 1433 | 300          | 44  | 7.8              |

The Size With \* Can Not Be Produced Now.



**SPORT RX6**

- Special asymmetric pattern design provides excellent high speed and handling performance.
- Spiral groove design contributes to outstanding water evacuation and wet grip.
- Special compound design reduces heat generation and enhances grip performance under all road conditions.



Handling



Braking



Drainage

| SIZE        | LOAD INDEX | SPEED RANGE | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|-------------|------------|-------------|--------------|--------------------|-----------------------|-----------------|------|--------------|-----|------------------|
|             |            |             |              |                    |                       | KG              | LBS  | KPa          | PSI |                  |
| 225/35ZR19  | 84         | W           | 8J           | 230                | 641                   | 500             | 1102 | 300          | 44  | 7.8              |
| 235/35ZR19  | 91 XL      | Y           | 8 1/2J       | 241                | 647                   | 615             | 1356 | 340          | 50  | 7.8              |
| 245/35ZR19  | 93 XL      | W           | 8 1/2J       | 248                | 655                   | 650             | 1433 | 340          | 50  | 7.8              |
| 245/40ZR19  | 98 XL      | W           | 8 1/2J       | 248                | 679                   | 750             | 1653 | 340          | 50  | 7.8              |
| 245/45R19 * | 102 XL     | W           | 8J           | 243                | 703                   | 850             | 1874 | 340          | 50  | 7.8              |
| 245/45R19   | 98         | Y           | 8J           | 243                | 703                   | 750             | 1653 | 300          | 44  | 7.8              |
| 265/30ZR19  | 93 XL      | W           | 9 1/2J       | 271                | 643                   | 650             | 1433 | 340          | 50  | 7.8              |
| 275/40R19 * | 105 XL     | W           | 9 1/2J       | 278                | 703                   | 925             | 2039 | 340          | 50  | 7.8              |
| 275/40ZR19  | 101        | Y           | 9 1/2 J      | 278                | 703                   | 825             | 1819 | 300          | 44  | 7.7              |
| 225/35ZR20  | 90 XL      | W           | 8J           | 230                | 666                   | 600             | 1323 | 340          | 50  | 7.8              |
| 245/40ZR20  | 95         | W           | 8 1/2J       | 248                | 704                   | 690             | 1521 | 300          | 44  | 7.8              |
| 245/45ZR20  | 99         | W           | 8J           | 243                | 728                   | 775             | 1709 | 300          | 44  | 7.8              |
| 275/30ZR20  | 93         | W           | 9 1/2J       | 278                | 674                   | 650             | 1433 | 300          | 44  | 7.8              |
| 275/35ZR20  | 98         | W           | 9 1/2J       | 278                | 700                   | 750             | 1653 | 300          | 44  | 7.8              |
| 275/40ZR20  | 106 XL     | Y           | 9 1/2J       | 278                | 728                   | 950             | 2094 | 340          | 50  | 7.8              |
| 275/45ZR20  | 110 XL     | Y           | 9J           | 273                | 756                   | 1060            | 2337 | 340          | 50  | 7.8              |
| 275/55R20   | 117 XL     | V           | 8 1/2J       | 284                | 810                   | 1285            | 2833 | 340          | 50  | 7.8              |
| 245/30ZR22  | 92 XL      | W           | 8 1/2J       | 248                | 707                   | 630             | 1389 | 340          | 50  | 7.8              |
| 245/35ZR22  | 97 XL      | W           | 8 1/2J       | 248                | 731                   | 730             | 1609 | 340          | 50  | 7.8              |
| 285/45R22 * | 114 XL     | W           | 9 1/2J       | 285                | 815                   | 1180            | 2601 | 340          | 50  | 7.8              |
| 305/40ZR22  | 114 XL     | W           | 11J          | 313                | 803                   | 1180            | 2601 | 340          | 50  | 7.8              |

The Size With \* Can Not Be Produced Now.



**SUV** **RX702**

- *Optimized tread formula ensures excellent skid resistance on wet roads, and low rolling resistance on dry roads.*
- *Streamline transversal grooves ensure good wet traction and superior water evacuation.*
- *The designed pattern blocks ensure the driving power on various road surfaces.*



| SIZE       | LOAD INDEX | SPEED RANGE | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|------------|------------|-------------|--------------|--------------------|-----------------------|----------|------|--------------|-----|------------------|
|            |            |             |              |                    |                       | KG       | LBS  | KPa          | PSI |                  |
| 205/70R15  | 96         | H           | 6J           | 209                | 669                   | 710      | 1565 | 300          | 44  | 7.8              |
| 255/70R15  | 108        | H           | 7 1/2J       | 260                | 739                   | 1000     | 2204 | 300          | 44  | 7.8              |
| 215/65R16  | 98         | H           | 6 1/2J       | 221                | 686                   | 750      | 1653 | 300          | 44  | 7.8              |
| 235/60R16  | 100        | H           | 7J           | 240                | 688                   | 800      | 1764 | 300          | 44  | 7.8              |
| 245/70R16  | 107        | H           | 7J           | 248                | 750                   | 975      | 2149 | 300          | 44  | 7.8              |
| 265/70R16  | 112        | H           | 8J           | 272                | 778                   | 1120     | 2469 | 300          | 44  | 7.8              |
| 275/70R16  | 114        | H           | 8J           | 279                | 792                   | 1180     | 2601 | 300          | 44  | 7.8              |
| 215/60R17  | 96         | H           | 6 1/2J       | 232                | 684                   | 710      | 1565 | 300          | 44  | 8                |
| 225/60R17  | 99         | V           | 6 1/2J       | 228                | 702                   | 775      | 1709 | 300          | 44  | 7.8              |
| 225/65R17  | 102        | V           | 6 1/2J       | 228                | 724                   | 850      | 1874 | 300          | 44  | 7.8              |
| 235/55R17  | 99         | H           | 7 1/2J       | 245                | 690                   | 775      | 1709 | 300          | 44  | 7.8              |
| 235/60R17  | 102        | V           | 7J           | 240                | 714                   | 850      | 1874 | 300          | 44  | 7.8              |
| 235/65R17  | 104        | V           | 7J           | 240                | 738                   | 900      | 1984 | 300          | 44  | 7.8              |
| 245/65R17  | 107        | H           | 7J           | 248                | 750                   | 975      | 2149 | 300          | 44  | 7.8              |
| 265/65R17  | 112        | H           | 8J           | 272                | 776                   | 1120     | 2469 | 300          | 44  | 7.8              |
| 275/55R17  | 109        | V           | 8 1/2J       | 284                | 734                   | 1030     | 2271 | 300          | 44  | 7.8              |
| 275/65R17  | 115        | H           | 8J           | 279                | 790                   | 1215     | 2679 | 300          | 44  | 7.8              |
| 285/65R17  | 116        | H           | 8 1/2J       | 292                | 802                   | 1250     | 2756 | 300          | 44  | 7.8              |
| 215/55R18  | 95         | V           | 7J           | 226                | 693                   | 690      | 1521 | 300          | 44  | 7.8              |
| 235/55ZR18 | 104 XL     | W           | 7 1/2J       | 245                | 715                   | 900      | 1984 | 340          | 50  | 7.8              |
| 235/60R18  | 107 XL     | V           | 7J           | 240                | 739                   | 975      | 2149 | 340          | 50  | 7.8              |
| 255/55ZR18 | 109 XL     | W           | 8J           | 265                | 737                   | 1030     | 2271 | 340          | 50  | 7.8              |
| 255/60R18  | 112 XL     | V           | 7 1/2J       | 260                | 763                   | 1120     | 2469 | 340          | 50  | 7.8              |
| 245/55ZR19 | 103        | W           | 7 1/2J       | 253                | 753                   | 875      | 1929 | 300          | 44  | 7.8              |
| 255/50ZR19 | 107 XL     | W/Y         | 8J           | 265                | 739                   | 975      | 2149 | 340          | 50  | 7.8              |
| 255/55ZR19 | 111 XL     | W           | 8J           | 265                | 763                   | 1090     | 2403 | 340          | 50  | 7.8              |
| 245/35ZR20 | 95 XL      | W/Y         | 8 1/2J       | 248                | 680                   | 690      | 1521 | 340          | 50  | 7.8              |
| 255/35ZR20 | 97 XL      | W/Y         | 9J           | 260                | 686                   | 730      | 1609 | 340          | 50  | 7.8              |



Safety



Handling



Braking




Long Mileage



**SUV** **RX706**

- Wide-angle lateral grooves ensure excellent on-and-off road performance.
- Unique pattern design reduces noise generation, improves driving stability and wet grip performance.
- Optimized tread compound contributes to good durability, good driving comfort, high traction on both dry and wet grounds.

| SIZE          | LOAD INDEX | SPEED RANGE | PLY  | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX LOAD DOUBLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|---------------|------------|-------------|------|--------------|--------------------|-----------------------|-----------------|------|-----------------|------|--------------|-----|------------------|
|               |            |             |      |              |                    |                       | KG              | LBS  | KG              | LBS  | KPa          | PSI |                  |
| 31 10.50R15LT | 109        | S           | 6PR  | 8 1/2J       | 268                | 775                   | 1030            | 2270 | -               | -    | 350          | 50  | 10.5             |
| P235/75R15    | 108 XL     | T           | -    | 6 1/2J       | 235                | 733                   | 990             | 2183 | -               | -    | 340          | 50  | 8.2              |
| 235/75R15     | 109XL      | T           | -    | 6 1/2J       | 235                | 733                   | 1030            | 2271 | -               | -    | 340          | 50  | 8.2              |
| LT215/85R16   | 115/112    | S           | 10PR | 6J           | 216                | 772                   | 1215            | 2680 | 1120            | 2470 | 550          | 80  | 10.5             |
| LT225/75R16   | 115/112    | S           | 10PR | 6J           | 223                | 744                   | 1215            | 2680 | 1120            | 2470 | 550          | 80  | 10.5             |
| P235/70R16    | 104        | T           | -    | 7J           | 240                | 736                   | 900             | 1984 | -               | -    | 300          | 44  | 8.2              |
| 235/70R16     | 106        | T           | -    | 7J           | 240                | 736                   | 950             | 2094 | -               | -    | 300          | 44  | 8.2              |
| LT235/85R16   | 120/116    | S           | 10PR | 6 1/2J       | 235                | 806                   | 1380            | 3042 | 1260            | 2778 | 550          | 80  | 10.5             |
| LT245/75R16   | 120/116    | S           | 10PR | 7J           | 248                | 774                   | 1380            | 3042 | 1260            | 2778 | 550          | 80  | 10.5             |
| LT265/75R16   | 123/120    | S           | 10PR | 7 1/2        | 267                | 804                   | 1550            | 3415 | 1400            | 3085 | 550          | 80  | 10.5             |
| LT285/75R16   | 122/119    | S           | 8PR  | 8J           | 286                | 834                   | 1500            | 3305 | 1360            | 3000 | 450          | 65  | 10.5             |
| LT305/70R16   | 118/115    | S           | 8PR  | 9J           | 311                | 834                   | 1320            | 2910 | 1215            | 2680 | 350          | 50  | 10.5             |
| P235/65R17    | 103        | T           | -    | 7J           | 240                | 738                   | 875             | 1929 | -               | -    | 300          | 44  | 8.2              |
| 235/65R17     | 104        | T           | -    | 7J           | 240                | 738                   | 900             | 1984 | -               | -    | 300          | 44  | 8.2              |
| LT265/70R17   | 121/118    | S           | 10PR | 8J           | 272                | 804                   | 1450            | 3195 | 1320            | 2910 | 550          | 80  | 10.5             |
| LT315/70R17   | 121/118    | S           | 8PR  | 9 1/2J       | 323                | 874                   | 1450            | 3195 | 1320            | 2910 | 350          | 50  | 10.5             |



Handling



Braking



Long Mileage



# ADVENTURE A/T

- Rectangle shoulder and wide tread design with 3D multiple thin sipes increases road contact area, provides superior handling on both wet and dry surfaces, and enhances wear-resisting performance.
- Wide pyramidal-shaped sipes for all-weather and various roads deliver excellent safety, maintain firm grip performance and aquaplaning resistance on wet roads, and enhance off-road steering response.
- Optimized pitching sequence block design offers a quieter ride.
- Unique lateral flange protector design enhances protection from puncture and impact damage.



| SIZE        | LOAD INDEX | SPEED RANGE | PLY  | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LOAD SINGLE |      | MAX LOAD DOUBLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|-------------|------------|-------------|------|--------------|--------------------|-----------------------|-----------------|------|-----------------|------|--------------|-----|------------------|
|             |            |             |      |              |                    |                       | KG              | LBS  | KG              | LBS  | KPa          | PSI |                  |
| 235/70R16   | 106        | T           | -    | 7J           | 240                | 736                   | 950             | 2094 | -               | -    | 300          | 44  | 10.1             |
| 225/65R17   | 106XL      | H           | -    | 6 1/2J       | 228                | 724                   | 950             | 2094 | -               | -    | 340          | 49  | 9.5              |
| 235/60R18   | 107XL      | H           | -    | 7J           | 240                | 739                   | 975             | 2149 | -               | -    | 340          | 49  | 9.5              |
| 285/60R18   | 120XL      | H           | -    | 8 1/2J       | 292                | 799                   | 1400            | 3086 | -               | -    | 340          | 49  | 10.1             |
| LT245/70R16 | 118/115    | S           | 10PR | 7J           | 248                | 750                   | 1320            | 2910 | 1215            | 2680 | 550          | 80  | 11.4             |
| LT245/75R16 | 120/116    | S           | 10PR | 7J           | 248                | 774                   | 1380            | 3042 | 1260            | 2778 | 550          | 80  | 11.4             |
| LT255/70R16 | 115/112    | S           | 8PR  | 7 1/2 J      | 260                | 764                   | 1215            | 2680 | 1120            | 2470 | 450          | 65  | 11.4             |
| LT265/70R16 | 121/118    | S           | 10PR | 8 J          | 272                | 778                   | 1450            | 3195 | 1320            | 2910 | 550          | 80  | 11.4             |
| LT265/75R16 | 123/120    | S           | 10PR | 7 1/2 J      | 267                | 804                   | 1550            | 3415 | 1400            | 3085 | 550          | 80  | 11.4             |
| LT245/65R17 | 111/108    | S           | 8PR  | 7 J          | 248                | 750                   | 1090            | 2405 | 1000            | 2205 | 450          | 65  | 11.4             |
| LT265/65R17 | 120/117    | S           | 10PR | 8 J          | 272                | 776                   | 1400            | 3085 | 1285            | 2835 | 550          | 80  | 11.4             |
| LT215/75R15 | 100/97S    | S           | 6PR  | 6J           | 216                | 703                   | 800             | 1765 | 730             | 1610 | 350          | 50  | 11.5             |
| LT235/75R15 | 116/113    | S           | 10PR | 6 1/2J       | 235                | 733                   | 1250            | 2755 | 1150            | 2535 | 550          | 80  | 13               |



Safety



Drainage





## GRAND TOURER HT

- Four wide longitudinal water-escaping grooves and spacious transverse water-escaping grooves water to improve water dispersion for excellent traction and braking on wet roads. Powerful with the luxurious SUV-oriented UHP tyre.
- Outstanding performance on all roads with the wide tread and high groove-sipe ratio. Tranquil ride with the ideal pitch design and the variable sound frequency blocks. Special quality with good performance on anti-puncture, underlay-damage and anti-friction from the unique sidewall protection layer.

| SIZE       | LOAD INDEX | SPEED RANGE | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|------------|------------|-------------|--------------|--------------------|-----------------------|----------|------|--------------|-----|------------------|
|            |            |             |              |                    |                       | KG       | LBS  | KPa          | PSI |                  |
| 205/70R15  | 96         | H           | 6 J          | 209                | 669                   | 710      | 1565 | 300          | 44  | 7.7              |
| 255/70R15  | 108        | H           | 7 1/2 J      | 260                | 739                   | 1000     | 2205 | 300          | 44  | 8                |
| 215/65R16  | 98         | H           | 6 1/2 J      | 221                | 686                   | 750      | 1653 | 300          | 44  | 7.7              |
| 225/70R16  | 103        | H           | 6 1/2 J      | 228                | 722                   | 875      | 1929 | 300          | 44  | 7.7              |
| 235/60R16  | 100        | V           | 7J           | 240                | 688                   | 800      | 1764 | 300          | 44  | 7.7              |
| 235/70R16  | 106        | H           | 7J           | 240                | 736                   | 950      | 2094 | 300          | 44  | 8                |
| 255/70R16  | 111        | H           | 7 1/2 J      | 260                | 764                   | 1090     | 2403 | 300          | 44  | 8                |
| 215/60R17  | 96         | H           | 6 1/2 J      | 221                | 690                   | 710      | 1565 | 300          | 44  | 7.7              |
| 225/60R17  | 99         | V           | 6 1/2 J      | 228                | 702                   | 775      | 1709 | 300          | 44  | 7.7              |
| 225/65R17  | 102        | V           | 6 1/2 J      | 228                | 724                   | 850      | 1874 | 300          | 44  | 7.7              |
| 235/55R17  | 99         | V           | 7 1/2 J      | 245                | 690                   | 775      | 1709 | 300          | 44  | 7.7              |
| 235/65R17  | 108 XL     | V           | 7 J          | 240                | 738                   | 1000     | 2205 | 340          | 49  | 7.7              |
| 245/65R17  | 107        | H           | 7 J          | 248                | 750                   | 975      | 2149 | 300          | 44  | 7.7              |
| 265/65R17  | 112        | H           | 8 J          | 272                | 776                   | 1120     | 2469 | 300          | 44  | 7.7              |
| 275/55R17  | 109        | H           | 8 1/2 J      | 284                | 734                   | 1030     | 2271 | 300          | 44  | 8                |
| 285/65R17  | 116        | H           | 8 1/2 J      | 292                | 802                   | 1250     | 2756 | 300          | 44  | 8                |
| 215/55R18  | 95         | V           | 7 J          | 226                | 693                   | 690      | 1521 | 300          | 44  | 7.7              |
| 225/55R18  | 98         | V           | 7 J          | 233                | 705                   | 750      | 1653 | 300          | 44  | 7.7              |
| 225/60R18  | 100        | H           | 6 1/2 J      | 228                | 727                   | 800      | 1764 | 300          | 44  | 7.7              |
| 235/55R18  | 100        | V           | 7 1/2 J      | 245                | 715                   | 800      | 1764 | 300          | 44  | 7.7              |
| 235/60R18  | 107 XL     | V           | 7 J          | 240                | 739                   | 975      | 2149 | 340          | 49  | 7.7              |
| 235/65R18  | 106        | H           | 7 J          | 240                | 763                   | 950      | 2094 | 300          | 44  | 7.7              |
| 255/55ZR18 | 109 XL     | W           | 8 J          | 265                | 737                   | 1030     | 2271 | 340          | 49  | 7.7              |
| 255/60R18  | 108        | H           | 7 1/2 J      | 260                | 763                   | 1000     | 2205 | 300          | 44  | 7.7              |
| 265/60R18  | 110        | H           | 8 J          | 272                | 775                   | 1060     | 2337 | 300          | 44  | 7.7              |
| 265/70R18  | 116        | T           | 8 J          | 272                | 829                   | 1250     | 2756 | 300          | 44  | 8                |
| 245/55ZR19 | 103        | W           | 7 1/2 J      | 253                | 753                   | 875      | 1929 | 300          | 44  | 7.7              |
| 255/50R19  | 107 XL     | W           | 8 J          | 265                | 739                   | 975      | 2149 | 340          | 49  | 7.7              |



Safety



Drainage



A/S RX718

Trailer

ST100



| SIZE        | LOAD INDEX | SPEED RANGE | PLY  | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX LOAD DOUBLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|-------------|------------|-------------|------|--------------|--------------------|-----------------------|-----------------|------|-----------------|------|--------------|-----|------------------|
|             |            |             |      |              |                    |                       | KG              | LBS  | KG              | LBS  | KPa          | PSI |                  |
| LT215/85R16 | 115/112    | S           | 10PR | 6J           | 216                | 772                   | 1215            | 2680 | 1120            | 2470 | 550          | 80  | 10.5             |
| LT225/75R16 | 115/112    | S           | 10PR | 6J           | 223                | 744                   | 1215            | 2680 | 1120            | 2470 | 550          | 80  | 10.5             |
| LT235/85R16 | 120/116    | S           | 10PR | 6 1/2J       | 235                | 806                   | 1380            | 3042 | 1260            | 2778 | 550          | 80  | 10.5             |
| LT245/75R16 | 120/116    | S           | 10PR | 7J           | 248                | 774                   | 1380            | 3042 | 1260            | 2778 | 550          | 80  | 10.5             |
| LT265/75R16 | 123/120    | S           | 10PR | 7 1/2        | 267                | 804                   | 1550            | 3415 | 1400            | 3085 | 550          | 80  | 10.5             |

| SIZE        | LOAD INDEX | SPEED RANGE | PLY  | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX LOAD DOUBLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|-------------|------------|-------------|------|--------------|--------------------|-----------------------|-----------------|------|-----------------|------|--------------|-----|------------------|
|             |            |             |      |              |                    |                       | KG              | LBS  | KG              | LBS  | KPa          | PSI |                  |
| ST175/80R13 | 91/87      | L           | 6PR  | 5J           | 177                | 610                   | 615             | 1360 | 545             | 1200 | 350          | 51  | 7.1              |
| ST205/75R14 | 100/96     | L           | 6PR  | 51/2J        | 203                | 664                   | 800             | 1760 | 710             | 1570 | 350          | 51  | 7.6              |
| ST205/75R14 | 105/101    | L           | 8PR  | 51/2J        | 203                | 664                   | 925             | 2040 | 825             | 1820 | 450          | 65  | 7.6              |
| ST205/75R15 | 101/97     | L           | 6PR  | 51/2J        | 203                | 689                   | 825             | 1820 | 730             | 1610 | 350          | 51  | 7.6              |
| ST205/75R15 | 107/102    | L           | 8PR  | 51/2J        | 203                | 689                   | 975             | 2150 | 850             | 1870 | 450          | 65  | 7.6              |
| ST225/75R15 | 113/108    | L           | 8PR  | 6J           | 223                | 719                   | 1150            | 2540 | 1000            | 2200 | 450          | 65  | 7.6              |
| ST225/75R15 | 117/112    | L           | 10PR | 6J           | 223                | 719                   | 1285            | 2830 | 1120            | 2470 | 550          | 80  | 7.6              |
| ST235/80R16 | 123/119    | L           | 10PR | 61/2J        | 235                | 782                   | 1550            | 3420 | 1360            | 3000 | 550          | 80  | 7.8              |
| ST235/80R16 | 126/122    | L           | 12PR | 61/2J        | 235                | 782                   | 1700            | 3750 | 1500            | 3305 | 660          | 95  | 7.8              |



# MT 200

- Especially designed for unpaved tough roads.
- Various shoulder blocks promote driving and handling performance on tough roads.
- Perfect grip on tough surfaces such as mud and sand.

| SIZE          | LOAD INDEX | SPEED RANGE | PLY  | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LOAD SINGLE |      | MAX LOAD DOUBLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|---------------|------------|-------------|------|--------------|--------------------|-----------------------|-----------------|------|-----------------|------|--------------|-----|------------------|
|               |            |             |      |              |                    |                       | KG              | LBS  | KG              | LBS  | KPa          | PSI |                  |
| 31 10.50R15LT | 109        | Q           | 6PR  | 8 1/2J       | 268                | 775                   | 1030            | 2270 | -               | -    | 350          | 50  | 14.6             |
| 33 12.50R15LT | 108        | Q           | 6PR  | 10J          | 318                | 826                   | 1000            | 2205 | -               | -    | 250          | 35  | 14.6             |
| LT235/75R16   | 117/114    | Q           | 10PR | 6 1/2J       | 235                | 758                   | 1285            | 2835 | 1180            | 2600 | 550          | 80  | 14.6             |
| LT235/85R16   | 120/116    | N           | 10PR | 6 1/2J       | 235                | 806                   | 1380            | 3042 | 1260            | 2778 | 550          | 80  | 14.6             |
| LT245/75R16   | 120/116    | N           | 10PR | 7J           | 248                | 774                   | 1380            | 3042 | 1260            | 2778 | 550          | 80  | 14.6             |
| LT265/75R16   | 123/120    | N           | 10PR | 7 1/2J       | 267                | 804                   | 1550            | 3415 | 1400            | 3085 | 550          | 80  | 14.6             |
| LT285/75R16   | 122/119    | Q           | 8PR  | 8J           | 286                | 834                   | 1500            | 3305 | 1360            | 3000 | 450          | 65  | 14.6             |
| LT265/70R17   | 121/118    | Q           | 10PR | 8J           | 272                | 804                   | 1450            | 3195 | 1320            | 2910 | 550          | 80  | 14.6             |
| LT285/70R17   | 121/118    | Q           | 8PR  | 8 1/2J       | 292                | 832                   | 1450            | 3195 | 1320            | 2910 | 450          | 65  | 14.6             |
| 35 12.50R17LT | 119        | Q           | 8PR  | 10J          | 318                | 877                   | 1360            | 3000 | -               | -    | 350          | 50  | 14.6             |
| LT275/70R18   | 125/122    | Q           | 10PR | 8J           | 279                | 843                   | 1650            | 3640 | 1500            | 3305 | 550          | 80  | 14.6             |
| 35 12.50R18LT | 123        | Q           | 10PR | 10J          | 318                | 877                   | 1550            | 3415 | -               | -    | 450          | 65  | 14.6             |
| 35 12.50R20LT | 121        | Q           | 10PR | 10J          | 318                | 877                   | 1450            | 3195 | -               | -    | 450          | 65  | 14.6             |



Braking



Drainage



## WINTER RX808

- Two wide main grooves and wide tread design ensures a superior handling performance on ice and snow ground.
- Sawtooth-shaped design on the tread guarantees excellent braking performance on ice and snow.
- Advanced silica compound offers enhanced traction and balance in winter driving conditions.
- Directional, v-shaped tread pattern improves water evacuation and enhances winter traction.



| SIZE      | LOAD INDEX | SPEED RANGE | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|-----------|------------|-------------|--------------|--------------------|-----------------------|----------|------|--------------|-----|------------------|
|           |            |             |              |                    |                       | KG       | LBS  | KPa          | PSI |                  |
| 165/70R13 | 79         | T           | 5.00B        | 170                | 562                   | 437      | 963  | 300          | 44  | 8.0              |
| 175/70R13 | 82         | T           | 5.00B        | 177                | 576                   | 475      | 1047 | 300          | 44  | 8.1              |
| 175/65R14 | 82         | T           | 5J           | 177                | 584                   | 475      | 1047 | 300          | 44  | 8.1              |
| 175/65R14 | 86 XL      | T           | 5J           | 177                | 584                   | 530      | 1168 | 340          | 50  | 8.1              |
| 185/60R14 | 82         | T/H         | 5 1/2J       | 189                | 578                   | 475      | 1047 | 300          | 44  | 8.2              |
| 185/65R14 | 90 XL      | T/H         | 5 1/2J       | 189                | 596                   | 600      | 1323 | 340          | 50  | 8.2              |
| 185/70R14 | 88         | T           | 5 1/2J       | 189                | 616                   | 560      | 1235 | 300          | 44  | 8.2              |
| 185/65R15 | 88         | T/H         | 5 1/2J       | 189                | 621                   | 560      | 1235 | 300          | 44  | 8.2              |
| 195/55R15 | 85         | T           | 6J           | 201                | 595                   | 515      | 1135 | 300          | 44  | 8.3              |
| 195/60R15 | 88         | T/H         | 6J           | 201                | 615                   | 560      | 1235 | 300          | 44  | 8.3              |
| 195/65R15 | 91         | T/H         | 6J           | 201                | 635                   | 615      | 1356 | 300          | 44  | 8.3              |
| 205/65R15 | 94         | T           | 6J           | 209                | 647                   | 670      | 1477 | 300          | 44  | 8.4              |
| 205/70R15 | 96         | T           | 6J           | 209                | 669                   | 710      | 1565 | 300          | 44  | 8.4              |
| 215/70R15 | 98         | T           | 6 1/2J       | 221                | 683                   | 750      | 1653 | 300          | 44  | 8.5              |
| 215/75R15 | 100        | T           | 6J           | 216                | 703                   | 800      | 1764 | 300          | 44  | 8.5              |
| 205/55R16 | 91         | T/H         | 6 1/2J       | 214                | 632                   | 615      | 1356 | 300          | 44  | 8.4              |
| 205/55R16 | 94 XL      | T/H         | 6 1/2J       | 214                | 632                   | 670      | 1477 | 340          | 50  | 8.4              |
| 215/55R16 | 93         | T/H         | 7J           | 226                | 642                   | 650      | 1433 | 300          | 44  | 8.5              |
| 215/55R16 | 97 XL      | T/V         | 7J           | 226                | 642                   | 730      | 1609 | 340          | 50  | 8.5              |
| 215/60R16 | 95         | T/H         | 6 1/2J       | 221                | 664                   | 690      | 1521 | 300          | 44  | 8.5              |
| 215/60R16 | 99 XL      | T/H         | 6 1/2J       | 221                | 664                   | 775      | 1709 | 340          | 50  | 8.5              |
| 215/65R16 | 98         | T/H         | 6 1/2J       | 221                | 686                   | 750      | 1653 | 300          | 44  | 8.5              |
| 215/70R16 | 100        | T/H         | 6 1/2J       | 221                | 708                   | 800      | 1764 | 300          | 44  | 8.5              |
| 225/60R16 | 102 XL     | T/H         | 6 1/2J       | 228                | 676                   | 850      | 1874 | 340          | 50  | 8.6              |
| 235/70R16 | 109 XL     | T/H         | 7J           | 240                | 736                   | 1030     | 2271 | 340          | 50  | 8.7              |
| 255/65R16 | 109        | T/H         | 7J           | 260                | 738                   | 1030     | 2271 | 300          | 44  | 8.9              |



## WINTER RX808

- Two wide main grooves and wide tread design ensures a superior handling performance on ice and snow ground.
- Sawtooth-shaped design on the tread guarantees excellent braking performance on ice and snow.
- Advanced silica compound offers enhanced traction and balance in winter driving conditions.
- Directional, v-shaped tread pattern improves water evacuation and enhances winter traction.



Handling



Braking

| SIZE      | LOAD INDEX | SPEED RANGE | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|-----------|------------|-------------|--------------|--------------------|-----------------------|----------|------|--------------|-----|------------------|
|           |            |             |              |                    |                       | KG       | LBS  | KPa          | PSI |                  |
| 215/55R17 | 94         | T           | 7J           | 226                | 668                   | 670      | 1477 | 300          | 44  | 8.5              |
| 215/55R17 | 98 XL      | V           | 7J           | 226                | 668                   | 750      | 1653 | 340          | 50  | 8.5              |
| 215/60R17 | 96         | T/H         | 6 1/2J       | 221                | 690                   | 710      | 1565 | 300          | 44  | 8.5              |
| 225/45R17 | 94 XL      | T/V         | 7 1/2J       | 225                | 634                   | 670      | 1477 | 340          | 50  | 8.6              |
| 225/50R17 | 94         | T           | 7J           | 233                | 658                   | 670      | 1477 | 300          | 44  | 8.6              |
| 225/50R17 | 98 XL      | V           | 7J           | 233                | 658                   | 750      | 1653 | 340          | 50  | 8.6              |
| 225/55R17 | 97         | T           | 7J           | 233                | 680                   | 730      | 1609 | 300          | 44  | 8.6              |
| 225/55R17 | 101 XL     | V           | 7J           | 233                | 680                   | 825      | 1819 | 340          | 50  | 8.6              |
| 225/60R17 | 99         | T/H         | 6 1/2J       | 228                | 702                   | 775      | 1709 | 300          | 44  | 8.6              |
| 225/65R17 | 102        | T/H         | 6 1/2J       | 228                | 724                   | 850      | 1874 | 300          | 44  | 8.6              |
| 235/55R17 | 99         | T           | 7 1/2J       | 245                | 690                   | 775      | 1709 | 300          | 44  | 8.7              |
| 235/55R17 | 103 XL     | V           | 7 1/2J       | 245                | 690                   | 875      | 1929 | 340          | 50  | 8.7              |
| 235/65R17 | 104        | T           | 7J           | 240                | 738                   | 900      | 1984 | 300          | 44  | 8.7              |
| 235/65R17 | 108 XL     | V           | 7J           | 240                | 738                   | 1000     | 2205 | 340          | 50  | 8.7              |
| 225/40R18 | 88         | T           | 8J           | 230                | 637                   | 560      | 1235 | 300          | 44  | 8.6              |
| 225/40R18 | 92 XL      | V           | 8J           | 230                | 637                   | 630      | 1389 | 340          | 50  | 8.6              |
| 225/45R18 | 95 XL      | T/V         | 7 1/2J       | 225                | 659                   | 690      | 1521 | 340          | 50  | 8.6              |
| 235/40R18 | 95 XL      | T/V         | 8 1/2J       | 241                | 645                   | 690      | 1521 | 340          | 50  | 8.7              |
| 235/45R18 | 94         | T           | 8J           | 236                | 669                   | 670      | 1477 | 300          | 44  | 8.7              |
| 235/45R18 | 98 XL      | V           | 8J           | 236                | 669                   | 750      | 1653 | 340          | 50  | 8.7              |
| 235/60R18 | 103        | T           | 7J           | 240                | 739                   | 875      | 1929 | 300          | 44  | 8.7              |
| 235/60R18 | 107 XL     | V           | 7J           | 240                | 739                   | 975      | 2149 | 340          | 50  | 8.7              |
| 255/55R18 | 109XL      | H           | 8J           | 265                | 737                   | 1030     | 2271 | 340          | 50  | 8.9              |



## WINTER RX818

- Serrated design in the outside main groove assures high grip and braking force on ICE&SNOW covered surfaces.
- Deep and densely distributed grooves and steel sheet helps soften the tread, contributes to shorten braking distance on ice covered surface.



| SIZE      | LOAD INDEX | SPEED RANGE | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|-----------|------------|-------------|--------------|--------------------|-----------------------|----------|------|--------------|-----|------------------|
|           |            |             |              |                    |                       | KG       | LBS  | KPa          | PSI |                  |
| 175/70R13 | 82         | T           | 5J           | 177                | 576                   | 475      | 1047 | 300          | 44  | 9.9              |
| 175/65R14 | 82         | T           | 5J           | 177                | 584                   | 475      | 1047 | 300          | 44  | 9.9              |
| 185/65R14 | 90 XL      | T           | 5 1/2J       | 189                | 596                   | 600      | 1323 | 340          | 50  | 9.9              |
| 185/65R15 | 88         | T           | 5 1/2J       | 189                | 621                   | 560      | 1235 | 300          | 44  | 9.9              |
| 195/60R15 | 88         | T           | 6J           | 201                | 615                   | 560      | 1235 | 300          | 44  | 9.9              |
| 195/65R15 | 91         | T           | 6J           | 201                | 635                   | 615      | 1356 | 300          | 44  | 9.9              |
| 205/65R15 | 94         | T           | 6J           | 209                | 647                   | 670      | 1477 | 300          | 44  | 9.9              |
| 205/70R15 | 96         | T           | 6J           | 209                | 669                   | 710      | 1565 | 300          | 44  | 9.9              |
| 215/70R15 | 98         | T           | 6 1/2J       | 221                | 683                   | 750      | 1653 | 300          | 44  | 9.9              |
| 205/55R16 | 91         | T           | 6 1/2J       | 214                | 632                   | 615      | 1356 | 300          | 44  | 9.9              |
| 205/55R16 | 94 XL      | T           | 7J           | 214                | 632                   | 670      | 1477 | 340          | 50  | 9.9              |
| 205/60R16 | 92         | T           | 6J           | 209                | 652                   | 630      | 1389 | 300          | 44  | 9.9              |
| 215/60R16 | 95         | T           | 6 1/2J       | 221                | 664                   | 690      | 1521 | 300          | 44  | 9.9              |
| 215/65R16 | 98         | T           | 6 1/2J       | 221                | 686                   | 750      | 1653 | 300          | 44  | 9.9              |
| 215/70R16 | 100        | T           | 6 1/2J       | 221                | 708                   | 800      | 1764 | 300          | 44  | 10.7             |
| 225/60R16 | 102 XL     | T           | 6 1/2J       | 228                | 676                   | 850      | 1874 | 340          | 50  | 9.9              |
| 235/70R16 | 109 XL     | T           | 7J           | 240                | 736                   | 1030     | 2271 | 340          | 50  | 10.7             |
| 225/65R17 | 102        | T           | 6 1/2J       | 228                | 724                   | 850      | 1874 | 300          | 44  | 10.7             |
| 235/65R17 | 104        | T           | 7J           | 240                | 738                   | 900      | 1984 | 300          | 44  | 10.7             |
| 245/45R17 | 95         | T           | 8J           | 243                | 652                   | 690      | 1521 | 300          | 44  | 9.9              |
| 265/70R17 | 115        | T           | 8J           | 272                | 804                   | 1215     | 2679 | 300          | 44  | 10.7             |

| SIZE        | LOAD INDEX | SPEED RANGE | PLY  | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX LOAD DOUBLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|-------------|------------|-------------|------|--------------|--------------------|-----------------------|-----------------|------|-----------------|------|--------------|-----|------------------|
|             |            |             |      |              |                    |                       | KG              | LBS  | KG              | LBS  | KPa          | PSI |                  |
| LT245/75R16 | 120/116    | Q           | 10PR | 7J           | 248                | 774                   | 1380            | 3040 | 1260            | 2780 | 550          | 80  | 13.1             |
| LT265/70R17 | 121/118    | Q           | 10PR | 8J           | 272                | 804                   | 1450            | 3195 | 1320            | 2910 | 550          | 80  | 13.1             |



Handling



Braking

# Winter Tire

PASSION FOR PERFECTION




## RX826

- Serrated design in the outside main groove assures high grip and braking force on ICE&SNOW covered surfaces.
- Deep and densely distributed grooves and steel sheet helps soften the tread, contributes to shorten braking distance on ice covered surface.



| SIZE      | LOAD INDEX | SPEED RANGE | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|-----------|------------|-------------|--------------|--------------------|-----------------------|-----------------|------|--------------|-----|------------------|
|           |            |             |              |                    |                       | KG              | LBS  | KPa          | PSI |                  |
| 235/75R15 | 105        | T           | 6 1/2J       | 235                | 733                   | 925             | 2039 | 300          | 44  | 9.0              |
| 215/65R16 | 98         | T           | 6 1/2J       | 221                | 686                   | 750             | 1653 | 300          | 44  | 8.8              |
| 235/70R16 | 109XL      | T           | 7J           | 240                | 736                   | 1030            | 2271 | 340          | 50  | 9.1              |
| 265/70R16 | 112        | T           | 8J           | 272                | 778                   | 1120            | 2469 | 300          | 44  | 9.0              |
| 215/60R17 | 96         | T           | 6 1/2J       | 221                | 690                   | 710             | 1565 | 300          | 44  | 8.8              |
| 225/65R17 | 102        | T           | 6 1/2J       | 228                | 724                   | 850             | 1874 | 300          | 44  | 8.8              |
| 245/65R17 | 107        | T           | 7J           | 248                | 750                   | 975             | 2149 | 300          | 44  | 9.0              |
| 265/65R17 | 112        | T           | 8J           | 272                | 776                   | 1120            | 2469 | 300          | 44  | 9.0              |
| 215/55R18 | 95         | T           | 7J           | 226                | 693                   | 690             | 1521 | 300          | 44  | 9.0              |
| 225/60R18 | 100        | T           | 6 1/2J       | 228                | 727                   | 800             | 1764 | 300          | 44  | 8.8              |
| 235/50R18 | 97         | T           | 7 1/2J       | 245                | 693                   | 730             | 1609 | 300          | 44  | 9.0              |
| 235/55R18 | 100        | T           | 7 1/2J       | 245                | 715                   | 800             | 1764 | 300          | 44  | 9.0              |
| 235/60R18 | 103        | T           | 7J           | 240                | 739                   | 875             | 1929 | 300          | 44  | 8.8              |
| 235/50R19 | 99         | H           | 7 1/2J       | 245                | 719                   | 775             | 1709 | 300          | 44  | 8.8              |
| 235/55R19 | 101        | T           | 7 1/2J       | 245                | 741                   | 825             | 1819 | 300          | 44  | 9.0              |
| 245/55R19 | 103        | T           | 7 1/2J       | 253                | 753                   | 875             | 1929 | 300          | 44  | 9.0              |
| 255/50R19 | 107XL      | H           | 8J           | 265                | 739                   | 975             | 2149 | 340          | 50  | 8.8              |
| 255/55R19 | 111XL      | H           | 8J           | 265                | 763                   | 1090            | 2403 | 340          | 50  | 8.8              |
| 275/40R20 | 106        | H           | 9 1/2J       | 278                | 728                   | 950             | 2094 | 340          | 50  | 8.8              |
| 275/45R20 | 110        | H           | 9J           | 273                | 759                   | 1060            | 2337 | 340          | 50  | 8.8              |



Handling



Braking

RX821



RX821

| SIZE      | LOAD INDEX | SPEED RANGE | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|-----------|------------|-------------|--------------|--------------------|-----------------------|-----------------|------|--------------|-----|------------------|
|           |            |             |              |                    |                       | KG              | LBS  | KPa          | PSI |                  |
| 155/65R13 | 73         | T           | 4 1/2J       | 157                | 532                   | 365             | 805  | 300          | 44  | 8.7              |
| 175/70R14 | 84         | T           | 5J           | 177                | 602                   | 500             | 1102 | 300          | 44  | 8.7              |
| 185/60R14 | 82         | T           | 5 1/2J       | 189                | 578                   | 475             | 1047 | 300          | 44  | 8.7              |
| 185/70R14 | 88         | T           | 5 1/2J       | 189                | 616                   | 560             | 1235 | 300          | 44  | 8.5              |
| 185/60R15 | 84         | T           | 5 1/2J       | 189                | 603                   | 500             | 1102 | 300          | 44  | 8.7              |
| 185/65R15 | 88         | T           | 5 1/2J       | 189                | 621                   | 560             | 1235 | 300          | 44  | 8.5              |
| 195/55R15 | 85         | T           | 6J           | 201                | 595                   | 515             | 1135 | 300          | 44  | 8.5              |
| 195/60R15 | 88         | T           | 6J           | 201                | 615                   | 560             | 1235 | 300          | 44  | 8.5              |
| 195/65R15 | 91         | T           | 6J           | 201                | 635                   | 615             | 1356 | 300          | 44  | 8.7              |
| 195/55R16 | 87         | T           | 6J           | 201                | 620                   | 545             | 1201 | 300          | 44  | 8.7              |
| 195/60R16 | 89         | T           | 6J           | 201                | 640                   | 580             | 1279 | 300          | 44  | 8.5              |
| 205/55R16 | 90         | T           | 6 1/2J       | 214                | 632                   | 600             | 1323 | 300          | 44  | 8.7              |
| 205/60R16 | 92         | T           | 6J           | 209                | 652                   | 630             | 1389 | 300          | 44  | 8.7              |
| 215/60R16 | 95         | T           | 6 1/2J       | 221                | 664                   | 690             | 1521 | 300          | 44  | 8.7              |
| 225/55R16 | 95         | T           | 7J           | 233                | 654                   | 690             | 1521 | 300          | 44  | 8.5              |
| 205/50R17 | 89         | T           | 6 1/2J       | 214                | 638                   | 580             | 1279 | 300          | 44  | 8.5              |
| 215/50R17 | 91         | T           | 7J           | 226                | 648                   | 615             | 1356 | 300          | 44  | 8.7              |
| 215/55R17 | 94         | T           | 7J           | 226                | 668                   | 670             | 1477 | 300          | 44  | 8.5              |
| 225/50R17 | 94         | T           | 7J           | 233                | 658                   | 670             | 1477 | 300          | 44  | 8.5              |
| 245/45R17 | 95         | T           | 8J           | 243                | 652                   | 690             | 1521 | 300          | 44  | 8.7              |
| 245/45R18 | 96         | T           | 8J           | 243                | 677                   | 710             | 1565 | 300          | 44  | 8.7              |
| 245/45R19 | 102XL      | H           | 8J           | 243                | 703                   | 850             | 1874 | 300          | 44  | 8.5              |
| 255/45R19 | 100        | H           | 8 1/2J       | 255                | 713                   | 800             | 1764 | 300          | 44  | 8.5              |

RX828

| SIZE       | LOAD INDEX | SPEED RANGE | PLY  | STANDARD RIM | SECTION WIDTH (MM) | OVERALL DIAMETER (MM) | MAX LAOD SINGLE |      | MAX LOAD DOUBLE |      | MAX PRESSURE |     | TREAD DEPTH (MM) |
|------------|------------|-------------|------|--------------|--------------------|-----------------------|-----------------|------|-----------------|------|--------------|-----|------------------|
|            |            |             |      |              |                    |                       | KG              | LBS  | KG              | LBS  | KPa          | PSI |                  |
| 185R14C    | 102/100    | Q           | 8PR  | 5 1/2J       | 188                | 650                   | 850             | 1875 | 800             | 1765 | 450          | 65  | 8.4              |
| 195/70R15C | 99/96      | R           | 8PR  | 6J           | 195                | 655                   | 775             | 1710 | 710             | 1565 | 450          | 65  | 10.2             |
| 6.50R16C   | 107/102    | M           | 10PR | 5.50F        | 185                | 750                   | 975             | 2150 | 850             | 1875 | 560          | 81  | 9.7              |
| 7.00R16C   | 111/107    | M           | 10PR | 5.50F        | 198                | 778                   | 1090            | 2405 | 975             | 2150 | 560          | 81  | 10.7             |